

LS Rubber Belt Blasters are designed to clean parts with shot while gently tumbling the parts to ensure no damage.


**CUSTOMED
ENGINEERED
SOLUTIONS!**



Swing doors are standard. Slide up and pneumatic door options.



Durable 4-ply rubber belt to be delicate on parts turning. Available as slats (metal).

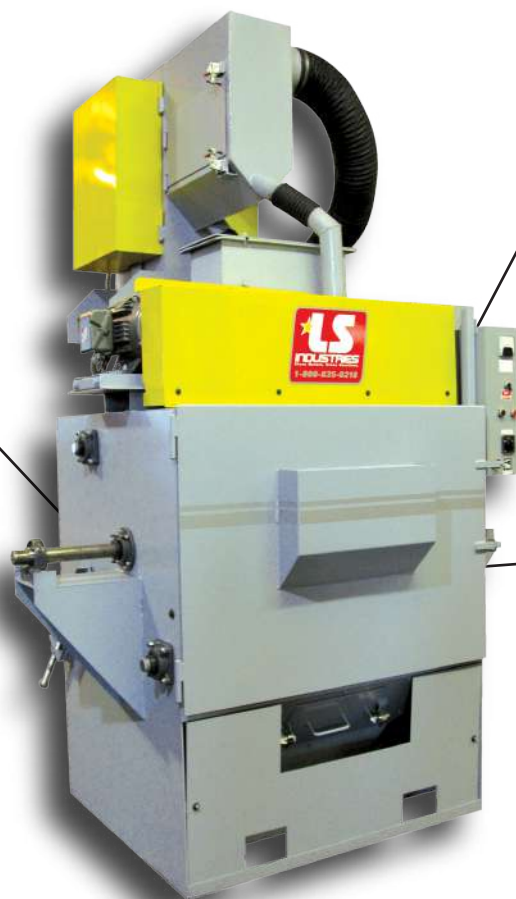

The wear plates and drum plates are constructed of manganese for an extra long life.

WATCH ME IN ACTION!



SCAN HERE

710 E. 17th St. • Wichita, Kansas 67214
TG: 800-835-0218 • 316-265-7997
Fax: 316-265-0013
sales@lsindustries.com
www.lsindustries.com

SPECIFICATIONS:

Pre-Engineered Models

MODEL #	OVERALL DIMENSIONS (W X H X D)	WORK ENVELOPE (FT ³)	NO. OF BLAST WHEELS (STD)	LOAD CAPACITY (LBS.)
RTB-1.25	48" x 36" x 86"	1.25	1 ea x 5HP	150
RTB-3	57.5" x 106" x 57.25"	3	1 ea x 10HP	400
RTB-6	78" x 102" x 126"	6	1 ea x 15HP	700
RTB-12	78" x 120" x 162"	12	1 ea x 20HP	1,000
RTB-24	108" x 105" x 237"	24	2 ea x 20HP	3,000

More sizes available

FEATURES:

- Side air wash
- Shot hopper with high/low shot sensor
- Small operating footprint
- Continuous molded rubber belt
- Safety interlocks
- Automatic timer controls
- Full load of media

OPTIONS:

- Full upper air wash / screens
- Elevator jam auto shutdown
- Parts sensor
- Automatic shot adder
- Parts blow off
- Maintenance/Service platform
- Automated loading/unloading
- Pneumatic door
- Air blast nozzle instead of wheel thrown
- Service package
- Fire Suppression



Before



After

